




ZF65 SPRAY NOZZLE SPECIFICATIONS

65° SPRAY ANGLE · FLAT SPRAY · QUICK DISCONNECT

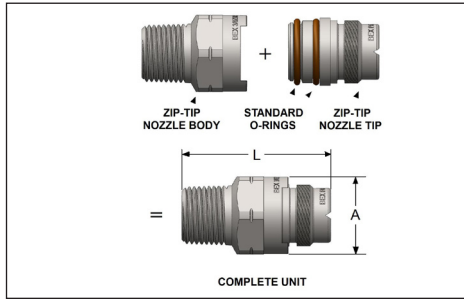

Spray angle not exactly as shown

SPRAY CHARACTERISTICS:

ZF65 series spray nozzles produce a flat, fan shaped spray pattern, with a spray angle of 65° at 40 PSI. Spray density tapers off toward the outside of these sprays, to permit overlapping of spray patterns while maintaining uniform spray density.

CONSTRUCTION:

The models listed are machined from bar stock and are one piece construction. Standard materials are brass, 303 stainless steel and 316 stainless steel. Other materials may be available upon request.

NOZZLE PIPE SIZE	Length 'L' (in)	Dim. 'A' (in)
1/8ZF	1.60	0.97
1/4ZF	1.70	0.97
3/8ZF	1.73	0.97
1/2ZF	1.80	0.97
1/2ZLF	2.11	1.25
3/4ZLF	2.19	1.25

TYPICAL APPLICATIONS:

- Parts Cleaning
- Metal Washing
- Foam control
- Gravel Washing
- Vehicle Washing
- Dishwashers
- Fertilizer spraying

Model ID	Equiv. Orif. Dia.	Capacities at Various Pressures													Spray Angles		
		5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF6502	0.034	0.071	0.084	0.100	0.122	0.141	0.173	0.200	0.224	0.245	0.283	0.32	0.39	0.55	53	65	72
ZF6503	0.041	0.106	0.126	0.150	0.184	0.212	0.260	0.300	0.34	0.37	0.42	0.47	0.58	0.82	53	65	72
ZF6504	0.047	0.141	0.167	0.200	0.245	0.283	0.35	0.40	0.45	0.49	0.57	0.63	0.77	1.10	54	65	72
ZF6505	0.053	0.177	0.209	0.250	0.306	0.35	0.43	0.50	0.56	0.61	0.71	0.79	0.97	1.37	54	65	72
ZF6506	0.058	0.212	0.251	0.300	0.37	0.42	0.52	0.60	0.67	0.73	0.85	0.95	1.16	1.64	54	65	72
ZF6508	0.067	0.283	0.33	0.40	0.49	0.57	0.69	0.80	0.89	0.98	1.13	1.26	1.55	2.19	55	65	71
ZF6510	0.075	0.35	0.42	0.50	0.61	0.71	0.87	1.00	1.12	1.22	1.41	1.58	1.94	2.74	57	65	73
ZF6512	0.082	0.42	0.50	0.60	0.73	0.85	1.04	1.20	1.34	1.47	1.70	1.90	2.32	3.3	59	65	71
ZF6515	0.091	0.53	0.63	0.75	0.92	1.06	1.30	1.50	1.68	1.84	2.12	2.37	2.90	4.1	59	65	72
ZF6520	0.105	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.24	2.45	2.83	3.2	3.9	5.5	61	65	72
ZF6530	0.129	1.06	1.26	1.50	1.84	2.12	2.60	3.00	3.4	3.7	4.2	4.7	5.8	8.2	62	65	72
ZF6540	0.149	1.41	1.67	2.00	2.45	2.83	3.5	4.0	4.5	4.9	5.7	6.3	7.7	11.0	63	65	72
ZF6550	0.167	1.77	2.09	2.50	3.06	3.5	4.3	5.0	5.6	6.1	7.1	7.9	9.7	13.7	63	65	73
ZF6560	0.182	2.12	2.51	3.00	3.7	4.2	5.2	6.0	6.7	7.3	8.5	9.5	11.6	16.4	63	65	73
ZF6570	0.197	2.47	2.93	3.5	4.3	4.9	6.1	7.0	7.8	8.6	9.9	11.1	13.6	19.2	63	65	74
ZLF6580	0.211	2.83	3.3	4.0	4.9	5.7	6.9	8.0	8.9	9.8	11.3	12.6	15.5	21.9	59	65	63
ZFL65100	0.236	3.5	4.2	5.0	6.1	7.1	8.7	10.0	11.2	12.2	14.1	15.8	19.4	27.4	59	65	69

* TABLE CONTINUES ON FOLLOWING PAGE



*TABLE CONTINUED FROM PREVIOUS PAGE

Model ID	Equiv. Orif. Dia.	Capacities at Various Pressures												Spray Angles			
		5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZLF65120	0.258	4.2	5.0	6.0	7.3	8.5	10.4	12.0	13.4	14.7	17.0	19.0	23.2	33	59	65	68
ZLF65150	0.289	5.3	6.3	7.5	9.2	10.6	13.0	15.0	16.8	18.4	21.2	23.7	29.0	41	59	65	68
ZLF65200	0.333	7.1	8.4	10.0	12.2	14.1	17.3	20.0	22.4	24.5	28.3	32	39	55	60	65	67
ZLF65300	0.408	10.6	12.5	15.0	18.4	21.2	26.0	30.0	34	37	42	47	58	82	60	65	68
ZLF65400	0.471	14.1	16.7	20.0	24.5	28.3	35	40	45	49	57	63	77	110	60	65	68

*TABLE CONTINUES ON FOLLOWING PAGE